

# Technische Daten

# Technical Specifications

MODEL	Voltage	Min. Load	Max. Load	Max. Power
SAW 30-120-2000G	12 V	0.00 A	2000 mA	24 W
SAW 30-240-1000G	24 V	0.00 A	1000 mA	24 W

SAW 30-XXX-YYYYG, XXX is 3V – 30V, YYYY is 100mA – 3500mA, max. power is 30W

INPUT	Parameter	Value
	Voltage	AC 90 V – 264 V
	Frequency	47 Hz - 63 Hz
	Current	1.2 A max.
	Inrush Current	40 A max.



OUTPUT	Parameter	Value
	Short Circuit Protection	Automatic Recovery
	Over-Current Protection	Automatic Recovery
	Output Regulation	± 5 %
	Turn On Time	3 s max.
	Line Regulation	1 % max.

OTHERS	Parameter	Value
	Cooling	Convection
	Efficiency	DoE Level VI
	Temperature Coefficient	0.05 % / °C
	Insulation Resistance	50 MΩ Primary – Secondary
	Leakage Current	0.25 mA max.

ENVIRONMENT	Parameter	Value
	Temperature	Operating: 0 °C – 40 °C / Storage: -20 °C – 80 °C
	Humidity	5 % RH – 95 % RH

**Safety** UL, cUL, FCC, CE (LVD), SAA, RCM, CB, BSI1363

**Case Dimensions** 71 mm × 43 mm × 29 mm

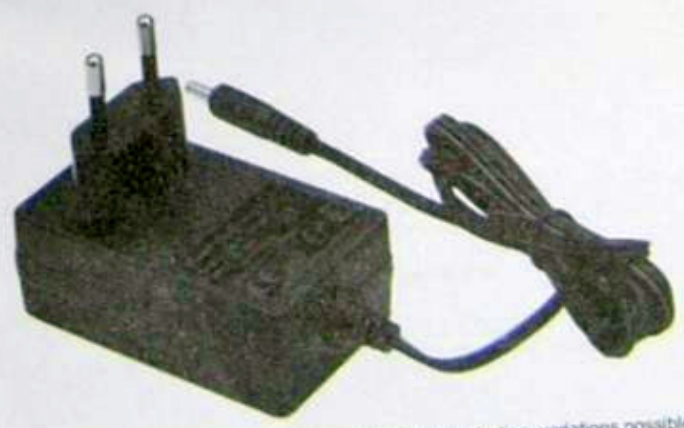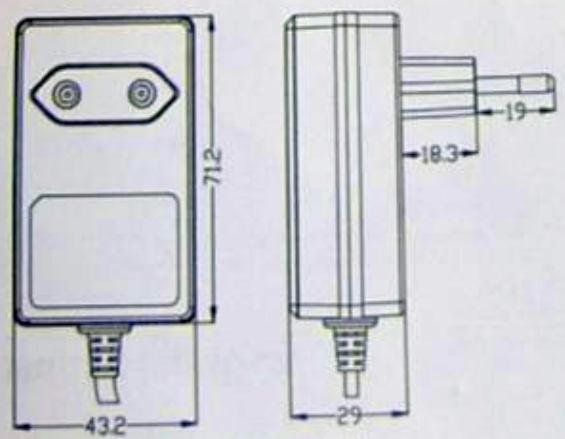

Änderungen vorbehalten, Abbildung ähnlich

Specifications subject to change, similar to illustration, variations possible